



OnLevel 3010 F Type Top Mount Channel - 0.74kN (Model: K.ON.10.3010.002.11)




- Suitable for line loads up to 0.74kN in accordance with BS6180.
- Using the Flex-Fit System, the installation can be done from one side only and glass adjusted accordingly.
- Pre drilled every 360mm and suitable for an M16 fixing.
- Supplied in plain anodised aluminium in 2.5 metre lengths.
- Non-stock item. Shipped direct from Manufacturer. Delivery usually 3-7 days.


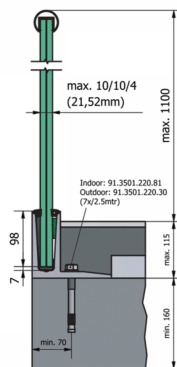



Attributes:

Product Code: K.ON.10.3010.002.11

Unit Of Sale: 2.5 Mtr



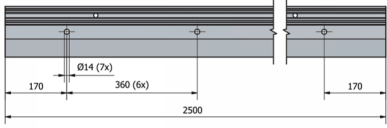

MODEL	 3010
MOUNTING	10 IN Top mount
APPLICATION	Private and commercial areas
GLASS THICKNESS	12 - 21,50 mm
COLOR LINE	✓
WATER DRAINAGE	✓
COVER STRIP	✗
AVAILABLE IN 3.0 kN	✓
MOUNTING DISTANCE	360 mm

