
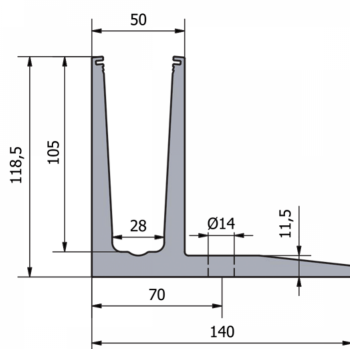
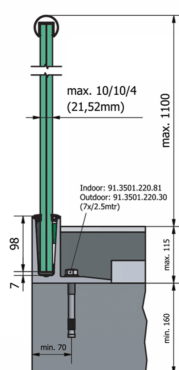


OnLevel 3010 F Type Top Mount Channel - 0.74kN (Model: K.ON.10.3010.002.11)





- Suitable for line loads up to 0.74kN in accordance with BS6180.
- Using the Flex-Fit System, the installation can be done from one side only and glass adjusted accordingly.
- Pre drilled every 360mm and suitable for an M16 fixing.
- Supplied in plain anodised aluminium in 2.5 metre lengths.
- Non-stock item. Shipped direct from Manufacturer. Delivery usually 3-7 days.

Attributes:

Product Code: K.ON.10.3010.002.11

Unit Of Sale: 2.5 Mtr

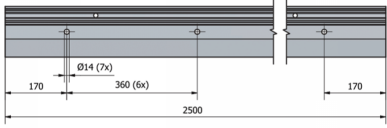

MODEL	3010
MOUNTING	1.0 kN Top mount
APPLICATION	Private and commercial areas
GLASS THICKNESS	12 - 21,52 mm
COLOR LINE	✓
WATER DRAINAGE	✓
COVER STRIP	✗
AVAILABLE IN 3.0 kN	✓
MOUNTING DISTANCE	360 mm

3D rendering of the 3010 glass railing system. The railing is shown installed on a concrete wall. The glass panel is 12 mm thick. The mounting distance is 360 mm. The railing is available in 3.0 kN and 1.0 kN top mount configurations. The railing is made of 12-21,52 mm thick glass. The railing is suitable for private and commercial areas. The railing has a color line and water drainage. The railing does not have a cover strip. The railing is available in 3.0 kN and 1.0 kN top mount configurations. The railing has a mounting distance of 360 mm.

