


## Flat Head UV Articulated Bolt For Variable Thickness Glass ( Model: KSP.R1003A-V-1465 )

These items are not held in stock and will require approximately 1-2 weeks delivery time

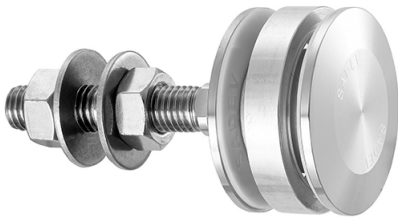


**Attributes:**

**Product Code:** KSP.R1003A-V-1465

**Unit Of Sale:** Each


**Dimensions**



**Components**

MARK	QUANTITY	DESCRIPTION	REFERENCE
1	1	Sinter body	XZ D 14 Mx 17 12.2 as per EN 10088-3
2	1	Flattened Nut	XZ D 14 Mx 16.5 1 as per EN 10088-3
3	1	Open hole grommet	AW 1000 as per EN 573-34-05-1,6
4	2	Contact washer	White polyamide/white polyethylene
5	1	Clash nut 3025	XZ D 14 Mx 17 12.2 as per EN 10088-3
6	1	Flat DIN 934	A4
7	2	Washer	A4
8	1	Lock washer DIN 927	A4
9	1	Flat DIN 934	A4
10	1	3025 Cap nut - Option	XZ D 14 Mx 17 12.2 as per EN 10088-3
11	1	Wash cap nut - Option	XZ D 14 Mx 17 12.2 as per EN 10088-3
12	1	Sealing ring	ACUMAP212017A (A4/MS) as per EN 573-3

**How to Use**



If it is required to provide the following information with each request, please contact us on: 15 years warranty, 0.8 & standard, 0.8 & 1.0 & 1.5  
Installation - the angle and diameter of the threaded part is not standard dimension (DIN 913) (the thickness of the glass to be used to request, the thickness of the sealing ring depends on the design of the glass)

**Method of Performance**

