

**Countersunk Fixed Bolt For 8 - 15mm Thick Glass ( Model: KSP.V2001-0815-1465 )**



Fixed bolt with a countersunk head for use in spider glazing systems. Manufactured using 316 grade stainless steel. Standard 65mm long axis and suitable for 8 - 15mm thick glass. Please see the other bolts in the range for additional glass thicknesses. Special dimension glass bolts available on request. Glassparts recommend using thread locking compound whenever possible. These items are not held in stock and will require approximately 1-2 weeks delivery time


**Attributes:**

**Product Code:** KSP.V2001-0815-1465

**Unit Of Sale:** Each


**Glass Drilling**

**Monolithic glass**




**Laminated glass**

V = 1<sup>st</sup> glass + intercalated films + 2<sup>nd</sup> glass



Available for glass thicknesses from 8 to 31.52mm, for other thicknesses please consult us.

It is important to provide the following information with each request: the glass composition (ex: 10mm monolithic, 8.8.4 laminated, 8.8.2.10-10 laminated); the length and diameter of the threaded zone for standard dimensions (M14, 85mm) (the reference of the spider to be used as support, or the thickness of an existing support for the delivery of the spacer).

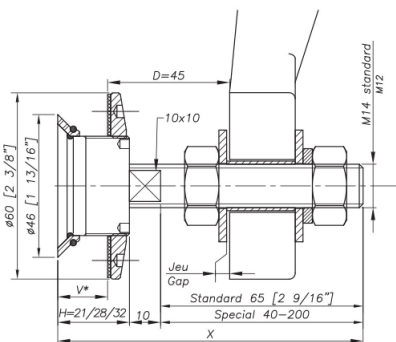


**Accessories**



Accessories	Material
1	316
2	316
3	316
4	316
5	316
6	316
7	316
8	316
9	316
10	316
11	316

**Technical Performance**



Quantity	Material
1	316
2	316
3	316
4	316
5	316
6	316
7	316
8	316
9	316
10	316
11	316